




### Tilt Switch Ball-Rolling Switch BT Series

#### SPECIFICATION



- Electrical Rating : 1~50mA /1.5~24VDC
- Electrical Life: >100,000 Cycles
- Contact Resistance: 300mΩ
- Solder Temperature: 250°C 3 Seconds
- Ambient Temperature: 0°C~100°C

#### MATERIAL



- Canister: Copper Shell Nickel Plated
- Electrode: Copper Gold Plated
- Rolling Ball: Stainless Steel Gold Plated
- Insulated Piece: Nylon 46(94V-0)

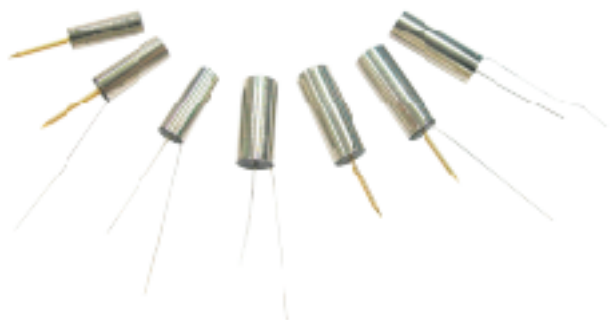



#### BT411 (Nickel Shell Coating)

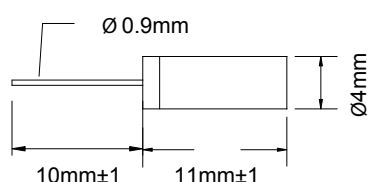

#### BT411-2

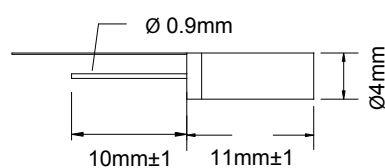



#### BT411-3

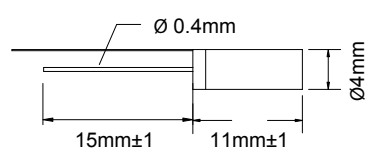





Tilt Switch Ball Rolling Switch BT Series



BT512-3

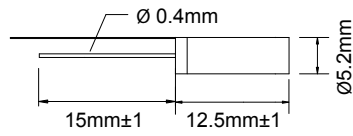

BT514



BT514-2

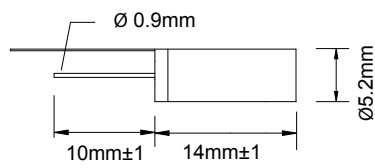

BT514-3

